


STORAGE REDEFINED

LiFeTIDE 25.6V | 100Ah 2560Wh | LiFePO4 Battery




LiFePO4
Cells




Smart
BMS



6,000 Cycles
@ 80% DoD



Flexible
Mounting



Fast
Charging

LIFETIDE 2560WH BATTERY SPECIFICATION SHEET

Our LiFeTIDE 25.6V 100Ah batteries offer second to none price to performance. Tier 1 A+ Cell Composition. 99% Efficiency LiFePO4 16 cell Pack. Laser Welded Cell Poles. Flexible Racking Options. Ultra-reliable Built-In Battery Management System.

100A

Built-In **BMS**


2560Wh

Storage **Capacity**

24V

Battery **Voltage**

DIMENSIONS

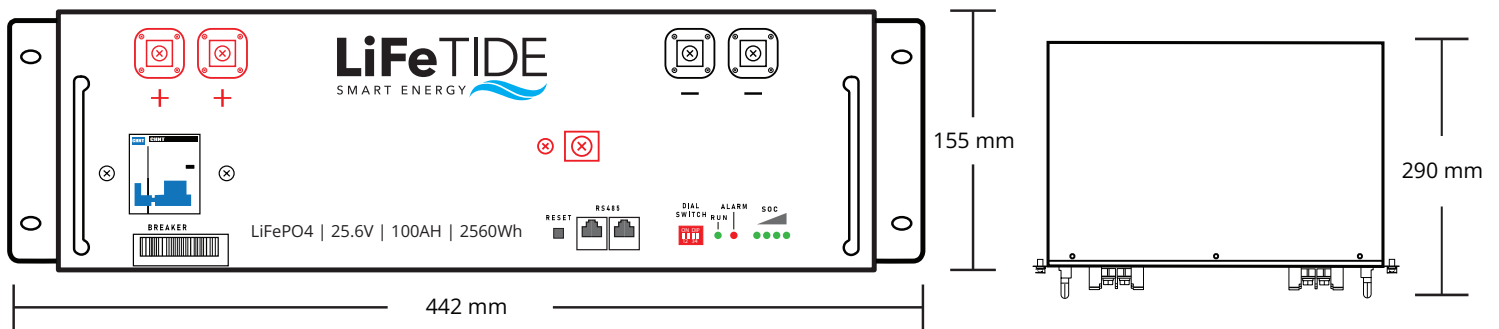

SUPERIOR PERFORMANCE

COMMUNICATIONS

The LiFeTIDE 2560Wh Battery communicates with a range of inverters including the Growatt 24V Series Inverters

*6,000 Cycles @ 80% DoD @ 0.5C Rate of Discharge
*3,000 Cycles @ 80% DoD @ 1C Rate of Discharge

PEACE OF MIND PERFORMANCE

- ✓ 6,000 CYCLES @ 80% DoD*
- ✓ TIER-1 | A+ CELLS
- ✓ LASER WELDED CELL CONNECTIONS
- ✓ BUILT-IN CIRCUIT BREAKER
- ✓ STACK UP TO 8 BATTERIES
- ✓ RS485 COMMUNICATION

We reserve the right to change information without prior notice. Information is checked to ensure for accuracy, however we will not be held responsible for clerical errors (Errors and Omissions Excepted)

LiFeTide South Africa

+27 10 012 6841

[f](#) @LiFeTide

[t](#) @LiFeTide

[e](mailto:sales@lifetide.co.za) sales@lifetide.co.za



LIFETIDE 2560WH BATTERY SPECIFICATION SHEET

DIMENSIONS

Length	290mm
Width	442mm
Height	155mm
Weight	23kg

ENVIRONMENTAL PARAMETERS

Charging Range	0°C to 50°C
Discharge Range	-20°C to 60°C
Storage Range	0°C to 45°C

GENERAL SPECIFICATIONS

Battery Type	LiFePO4
Voltage	25.6V
Nominal Capacity	100Ah
Watt-hour(s)	2560Wh
Charging Voltage (Bulk/Absorb)	28.4V ± 0.2V
Float	27V ± 0.2V
Low DC Cutoff	23.5-22V depending on load
Charging Current	100A 30-50A recommended
Discharging Current	100A

SUPERIOR PERFORMANCE

COMMUNICATIONS

The LiFeTIDE 2560Wh Battery communicates with a range of inverters including the Growatt 24V Series Inverters

*6,000 Cycles @ 80% DoD @ 0.5C Rate of Discharge
*3,000 Cycles @ 80% DoD @ 1C Rate of Discharge

PEACE OF MIND PERFORMANCE

- ✓ 6,000 CYCLES @ 80% DoD*
- ✓ TIER-1 | A+ CELLS
- ✓ LASER WELDED CELL CONNECTIONS
- ✓ BUILT-IN CIRCUIT BREAKER
- ✓ STACK UP TO 8 BATTERIES
- ✓ RS485 COMMUNICATION

We reserve the right to change information without prior notice. Information is checked to ensure for accuracy, however we will not be held responsible for clerical errors (Errors and Omissions Excepted)

LiFeTide South Africa

+27 10 012 6841

[f](#) @LiFeTide

[t](#) @LiFeTide

[e](mailto:sales@lifetide.co.za) sales@lifetide.co.za