


STORAGE REDEFINED

## LiFeTIDE 51.2V | 100Ah 5120Wh | LiFePO4 Battery



6,000 Cycles\*  
@ 80% DoD



1C/1C Continual  
Charge & Discharge




Tier 1 | A+  
LiFePO4 Cells




Easy Mounting  
or Racking



Built-In  
Fire Extinguisher



Smart  
BMS



Stackable to  
16 Batteries

LiFeTIDES 's battery BMS supports simultaneous communication and is compatible with multiple inverter brands

## COMPATIBILITY

Growatt

LU X POWER

Deye

victron energy  
BLUE POWER



RCT  
MADE FOR YOU

SUN SYNK®

phocos

## LIFETIDE 5120WH BATTERY

# SPECIFICATION SHEET

Our LiFeTIDE 51.2V 100Ah batteries offer second to none price to performance. Tier 1 A+ Cell Composition. 99% Efficiency LiFePO4 16 cell Pack. Laser Welded Cell Poles. Flexible Racking Options. Ultra-reliable Built-In Battery Management System.

**100A**

Built-In **BMS**


**5120Wh**

Storage **Capacity**

**48V**

Battery **Voltage**

## DIMENSIONS

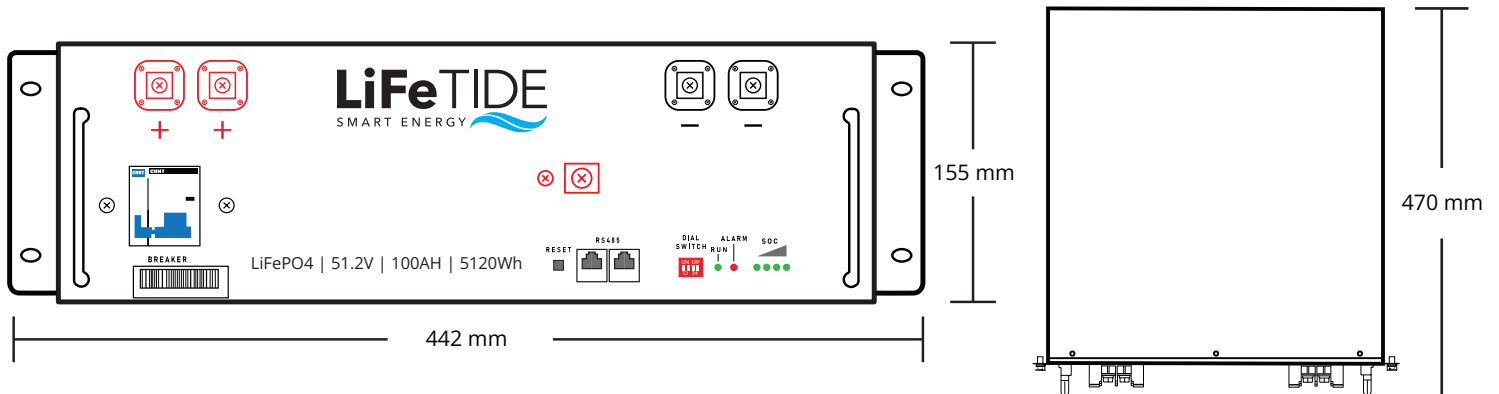

### SUPERIOR

## PERFORMANCE

### WARRANTY

Our LiFePO4 battery comes with a 5 year, 6 000 Cycle comprehensive warranty, providing you with peace of mind and assurance. You can rely on LiFeTIDE batteries for long-lasting performance and exceptional quality.

## PEACE OF MIND PERFORMANCE

- ✓ 6,000 CYCLES @ 80% DoD\*
- ✓ LASER WELDED CELL CONNECTIONS
- ✓ STACK UP TO 16 BATTERIES
- ✓ RACK MOUNT DESIGN
- ✓ BUILT-IN FIRE EXTINGUISHERS
- ✓ TIER-1 | A+ CELLS
- ✓ BUILT-IN CIRCUIT BREAKER
- ✓ RS485 COMMUNICATION

\*Test Condition: 80% DOD, 0.5C charge & discharge @25°C

We reserve the right to change information without prior notice. Information is checked to ensure for accuracy, however we will not be held responsible for clerical errors (Errors and Omissions Excepted)

LiFeTIDE South Africa

**+27 10 012 6841**

Facebook icon @LiFeTide

Twitter icon @LiFeTide

Email icon sales@lifetide.co.za



# LIFETIDE 5120WH BATTERY SPECIFICATION SHEET

## DIMENSIONS

Length	470mm
Width	442mm
Height	155mm
Weight	48kg

## ENVIRONMENTAL PARAMETERS

Charging Range	0°C to 50°C
Discharge Range	-20°C to 55°C
Storage Range	0°C to 45°C

## GENERAL SPECIFICATIONS

Battery Type	LiFePO4
Voltage	51.2V
Nominal Capacity	100Ah
Watt-hour(s)	5120Wh
Charging Voltage (Bulk/Absorb)	56.2V ± 0.2V
Float	54V ± 0.2V
Low DC Cutoff	47-44V depending on load
Charging Current	100A 30-50A recommended
Discharging Current	100A

## SUPERIOR PERFORMANCE

### WARRANTY

Our LiFePO4 battery comes with a 5 year, 6 000 Cycle comprehensive warranty, providing you with peace of mind and assurance. You can rely on LiFeTIDE batteries for long-lasting performance and exceptional quality.

## PEACE OF MIND PERFORMANCE

- ✓ 6,000 CYCLES @ 80% DoD\*
- ✓ LASER WELDED CELL CONNECTIONS
- ✓ STACK UP TO 16 BATTERIES
- ✓ RACK MOUNT DESIGN
- ✓ BUILT-IN FIRE EXTINGUISHERS
- ✓ TIER-1 | A+ CELLS
- ✓ BUILT-IN CIRCUIT BREAKER
- ✓ RS485 COMMUNICATION

\*Test Condition: 80% DOD, 0.5C charge & discharge @25°C

We reserve the right to change information without prior notice. Information is checked to ensure for accuracy, however we will not be held responsible for clerical errors (Errors and Omissions Excepted)

LiFeTIDE South Africa

**+27 10 012 6841**

[@LiFeTide](#)

[@LiFeTide](#)

[sales@lifetide.co.za](mailto:sales@lifetide.co.za)